




TYPE: ABT-10V
Indoor, Cast Resin Insulated
Supporting Type Current Transformer
F: 50-60 Hz DIN42600 IEC. 60044-1




Catalogue No: ABT-10V-2005

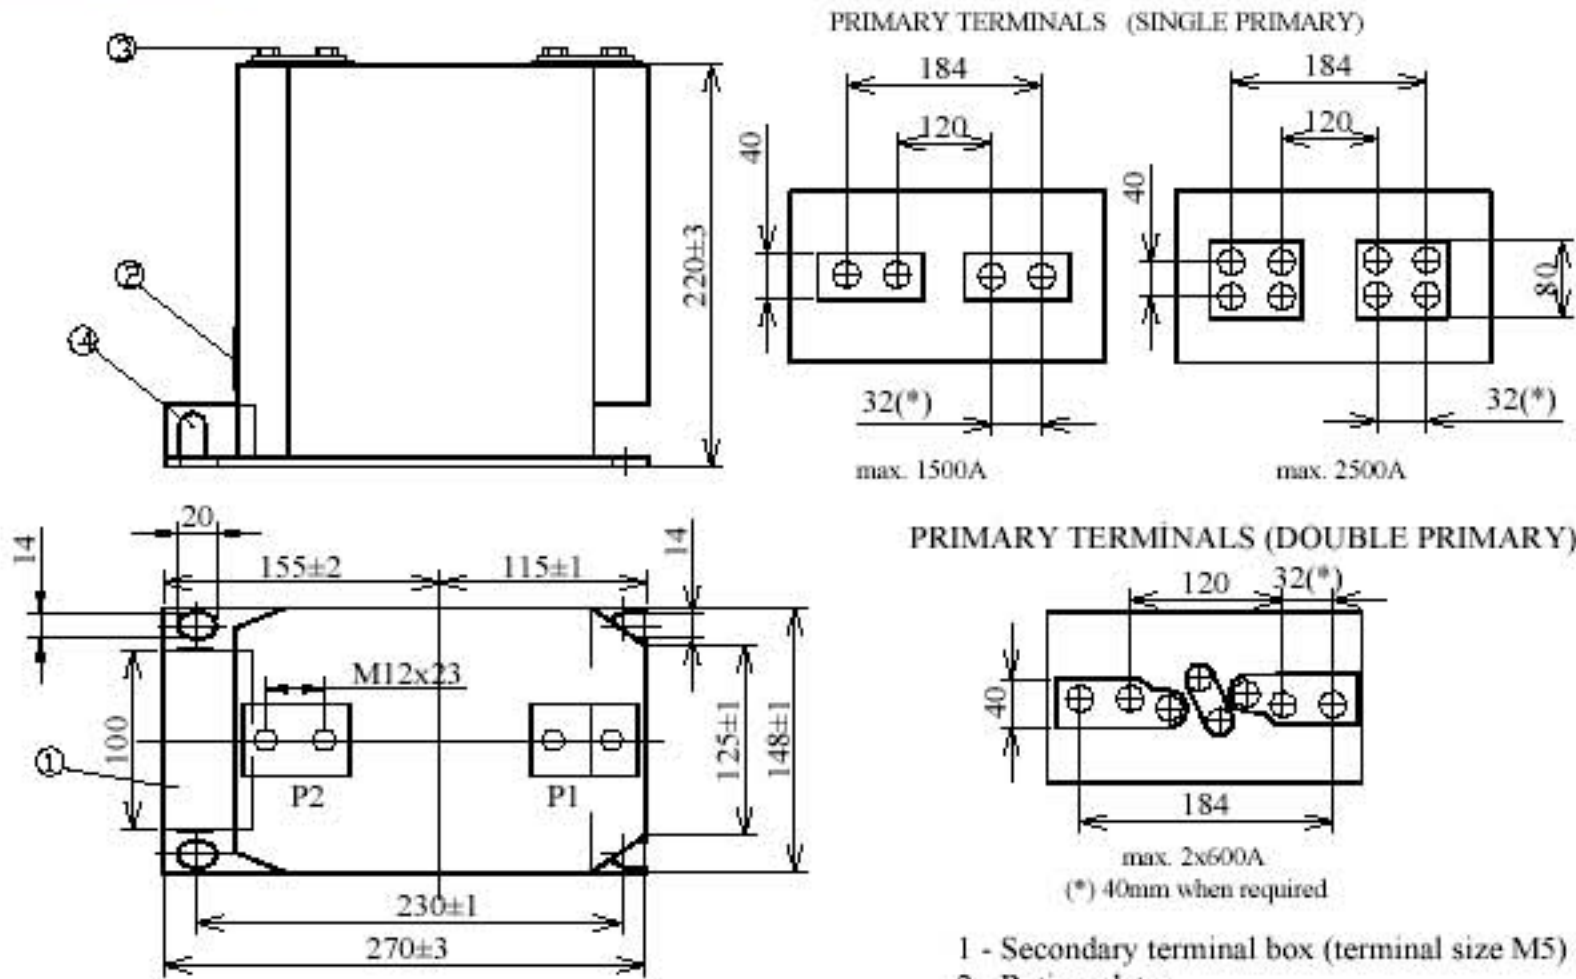

WINDING DIAGRAM

Type	ABT-10 V
Rated Insulation Level (kV)	12/28/75 or 17.5/38/95
Primary Current (A)	5...2500 or 2x5...600
Secondary Current (A)	1 - 2 - 5
Accuracy Class Measuring Protection	0.2 - 0.5 - 1 (Fs5) 5P - 10P - (10 - 20)
Burden (VA)	10 - 15
Thermal Current (Ith)	Max. 30kA / 1 sec
Cantilever Strength	>5000 N
Weight (kg)	16 - 18
Primary Connection	-Double ratio with series-parallel primary winding -Double ratio with taps in secondary windings

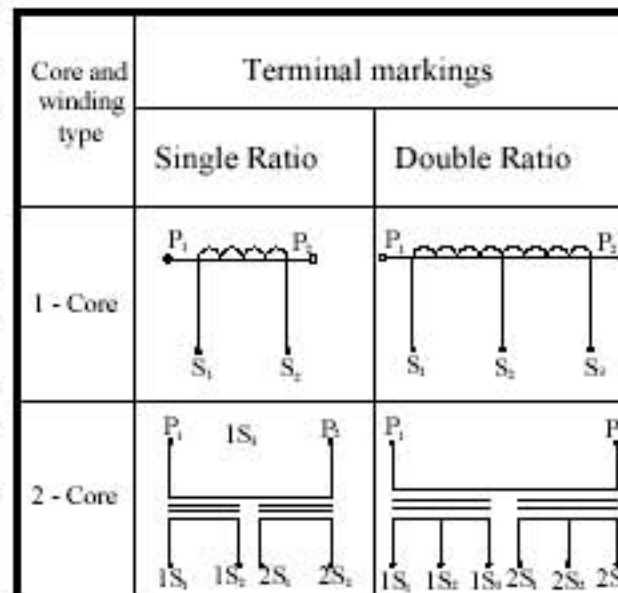

-All dimensions in mm.
 -Senerji reserves the rights to change the dimensions of the products



Address: Büyükdere Cd. No:159/12 Zincirlikuyu - İSTANBUL / TÜRKİYE
 Tel: +90 212 356 21 12 Fax: +90 212 356 21 11
 WEB: www.senerjieng.com Mail: info@senerjieng.com