





TYPE: ABT-30V

Indoor, Cast-Resin Insulated Supporting Type Current Transformers

f= 50-60 Hz. DIN42600, IEC 60044-1




Catalogue No: ABT-30V / 2005

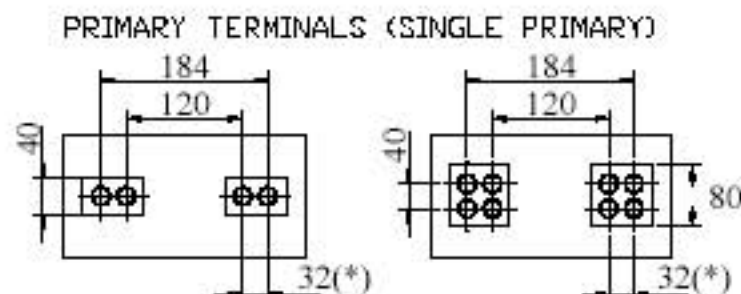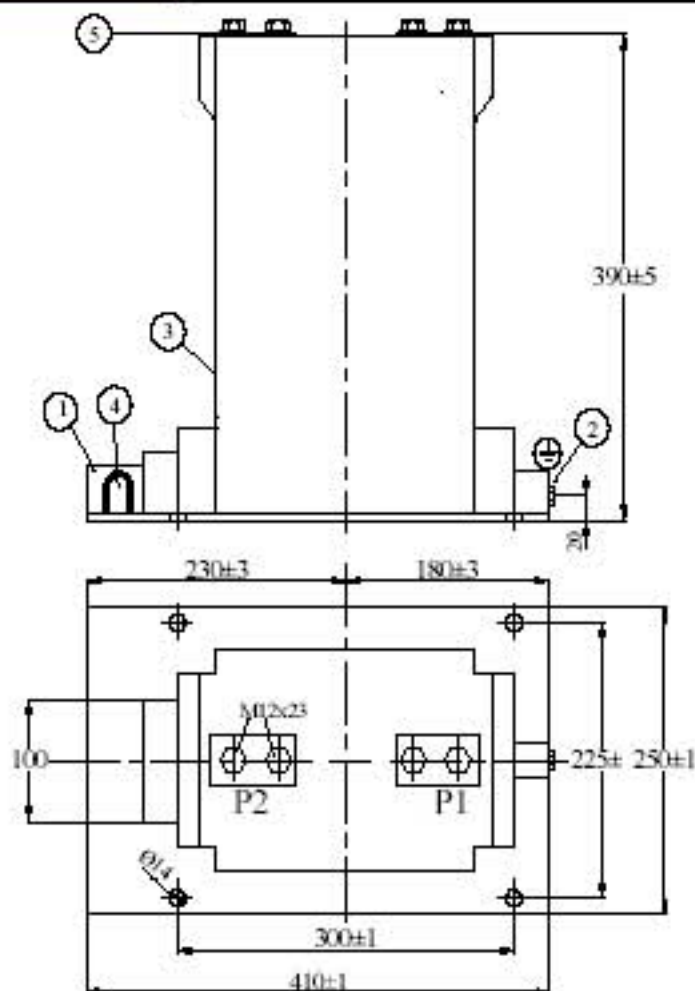

max. 1500A

max. 2500A

PRIMARY TERMINALS (DOUBLE PRIMARY)




max. 2x600A

(*)40 mm when required

- 1- Secondary terminal box (Terminal size M5)
- 2- Grounding screw size M8
- 3- Rating plate
- 4- Primary terminals

Type	ABT- 30V
Rated Insulation Level(kV)	36 / 70 / 170
Primary Current (A)	5...2000 or 2x5...2x600 1
Secondary Current (A)	1 - 2 - 5
Accuracy Class Measuring Protection	0.2 - 0.5 - 1 (Fs5) & 0.2S - 0.5S SP - 10P (10 - 20)
Burden (VA)	10 - 15 - 30
Thermal Current (Ith)	Max. 30 kA. / 1 sec.
Cantilever Strength	> 5000 N
Weight (kg)	33 - 35
Primary Connection	- Double ratio with series-parallel primary windings - Double ratio with taps in secondary windings

WINDING DIAGRAM

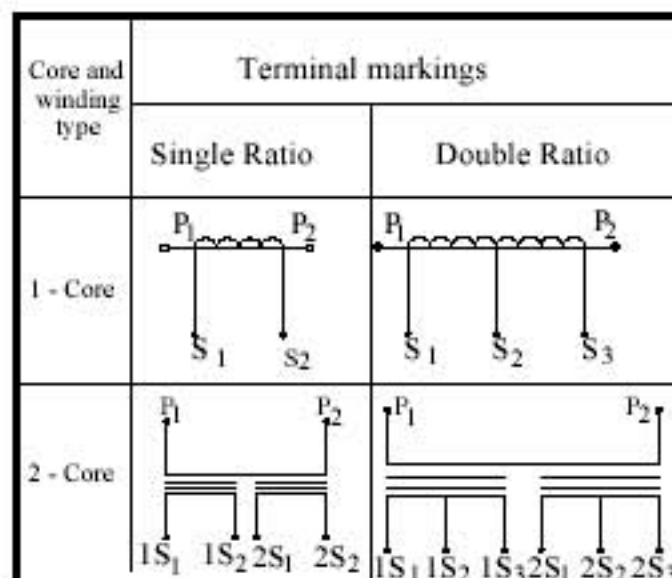

-All dimensions in mm.

-Senerji reserves the rights to change the dimensions of the products



Address: Büyükdere Cd. No:159/12 Zincirlikuyu - İSTANBUL / TÜRKİYE

Tel: +90 212 356 21 12 Fax: +90 212 356 21 11

WEB: www.senerjieng.com Mail: info@senerjieng.com